




Dingli Australia



www.dingliaustralia.com.au





Summit

SC1017-AWD

SELF-PROPELLED ROUGH-TERRAIN SCISSOR LIFTS

Summit

SC1017-AWD

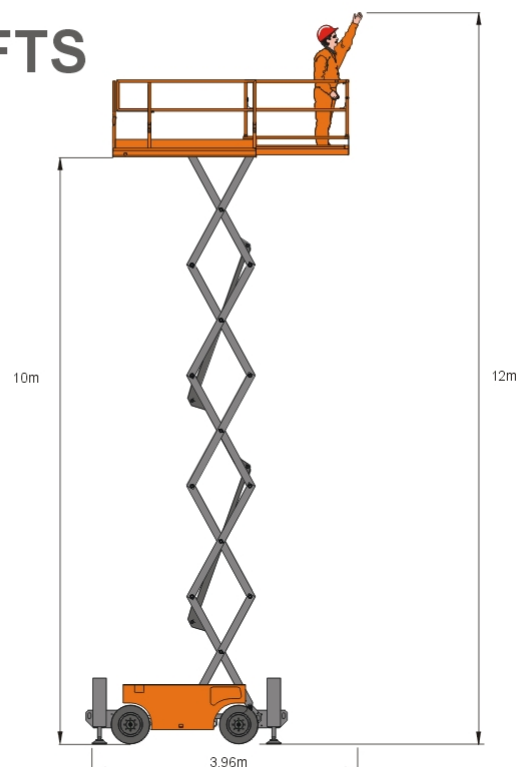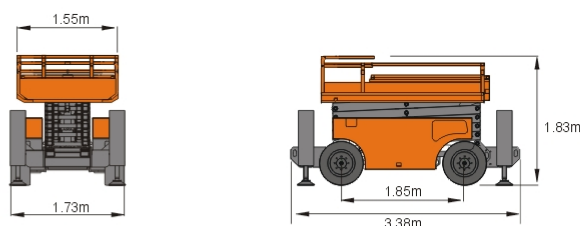

	S.W.L	454kg/1000lb
	S.W.L on extension	136kg/300lb
	Maximum workers number	4

	Working height	12.0m/39ft4in
	Platform floor height	10.0m/32ft9in

	Overall length	3.38m/11ft1in
	Overall width	1.73m/5ft8in
	Overall height(Rails up)	2.45m/8ft0.4in
	Overall height(Rails down)	1.83m/6ft
	Platform size	2.51X1.55m/8ft2inx5ft1in
	Platform extension size	1.45m/4ft9in
	Ground clearance	0.19m/7in
	Wheelbase	1.85m/6ft0.8in
	Turning radius(Inside)	1.52m/4ft12in
	Turning radius(Outside)	3.68m/12ft0.8in

	Engine	Kubota D905 15.5kw/3600 rpm
--	--------	-----------------------------

	Travel speed(Stowed)	6.1km/h
	Travel speed(Raised)	0.8km/h
	Up/Down speed	40/37 sec

	Gradeability	30%
	Maximum working slope	2 - 3 °

	Hydraulic tank	62.5L
	Diesel tank	56.8L

	Tyres(foam- filled)	Φ300X600 mm
--	---------------------	-------------

	Weight	4098kg/9034lb
--	--------	---------------

Standard equipment

- Proportional controls
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 4WD
- Automatic brakes system
- Swing-out engine tray
- Safety electric pump
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- Anti-restart engine protection
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Folding guardrails
- Extended platform
- Charger protection
- European III emission engine
- Flashing Beacon
- Automatic leveling hydraulic outriggers
- AC power on the platform

Options

- Overload sensor with alarm
- Platform work lights
- Airline to the platform
- Hydraulic generator
- Hydraulic oil cooler

