

Performance

Platform Height—Elevated 5.64 m Platform Height—Lowered 1.0 m Platform Capacity 230 ka Capacity on Deck Extension 120 kg Lift/Lower Time 25/26 sec Maximum Drive Height 5.64 m Weight 1,588 kg Ground Bearing Pressure 8.4 kg/cm²

Drive Speed

Lowered 4 km/h Elevated 0.8 km/h Gradeability 25%

Turning Radius

Inside 0.6 m Outside 2.2 m

Standard Specifications

Tyres

• Solid, Non-Marking

Brakes

- Electric, Friction on Drive Wheels
- Guard Rail Type--Fixed

Power Source

 Batteries
 4 x 6V, 220 AH

 Charger
 25 Amp

 Drive
 24V DC

Pump 3.2 cc/rev @ 2,300 psi (178 kg/cm²)

Hydraulic System

Capacity 5 L

Standard Features

- Proportional Controls
- Industry Leading Duty Cycles
- Battery Condition Indicator
- Automatic Traction Control (ATC)
- All Motion Alarm
- 25 Amp Automatic SCR Charger
- Horn
- Hourmeter
- Flashing Amber Beacon

- Lubrication-Free Scissor Arm Bushings
- Tilt Alarm and Light
- LSS Load Sensing System
- Forklift Pockets
- Moveable, Removable Platform Control
- Manual Descent Pull Cable
- Mechanized Pothole Protection
- Scissor Maintenance Prop
- 70 cm Roll-Out Deck Extension

Accessories & Options

- AC Power to Platform
- Anti-Vandal Control Box Covers
- Squawker Motion Alarm
- 220 Amp-Hour AGM Batteries
- IP65 Fixed Charger Inlet
- Special Hydraulic Oils









Dimensions

All dimensions are approximate.

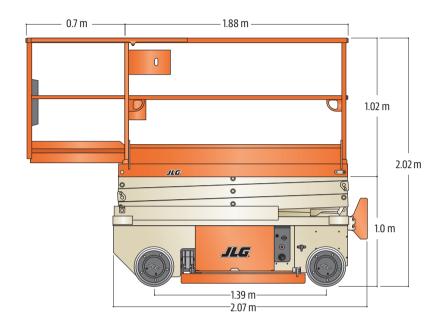





The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/ or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

JLG Industries, Inc.

358 Park Road Regents Park, NSW 2143 Telephone 02 8718 6300 Fax 02 8718 6377

www.jlg.com.au

An Oshkosh Corporation Company