


Max Working Height (m)	21.70
Max Platform Height (m)	19.70
Max Horizontal Working Outreach (m)	10.30
Max Horizontal Outreach to edge of basket (m)	9.80
Lift Capacity / SWL (kg)	200 (230 EVO model)
Weight / Outreach Limited (Yes/No)	No
Turret Rotation	365°
Basket Rotation	Up to 180°
Length with basket (m)	5.98
Length w/out basket (m)	5.28
Width stowed tracks (m)	0.98
Height (m) stowed	2.07
Basket Dimensions	1.5 x 0.7
Total Weight (kg)	ECO:3000 PRO:3150 HYBRID:3380
Max ground pressure driving (approx)	65 kN/m ²
Max stabilizer force	20 kN
Max stabilizer pressure with std foot pad	500kN/m ²
Gradeability length-wise	29% / 16 degrees
Gradeability sideways	27% / 15 degrees
Stabilizer set-up dimensions	4.184 x 4.139 o/o
Narrow set-up dimensions	5.318 x 2.806 o/o
Max slope for stabilizers	17 degrees
Stabilization system	Radio/auto
Standard Power Source/s	Kubota 14 HP Diesel & 240 Volt Electric System
Optional Power Sources (Hybrid model)	Kubota 14 HP Diesel & Battery System
Drive system	Tracks
Expanding tracks	Std
Drive speed km/h	2.5
2 Speed Drive	No
Remote drive control	Radio Std
Battery voltage	12
Basket load control	Std
Electric & Air outlets in basket	Std
Electric emergency lowering	Std

SPECIFICATIONS

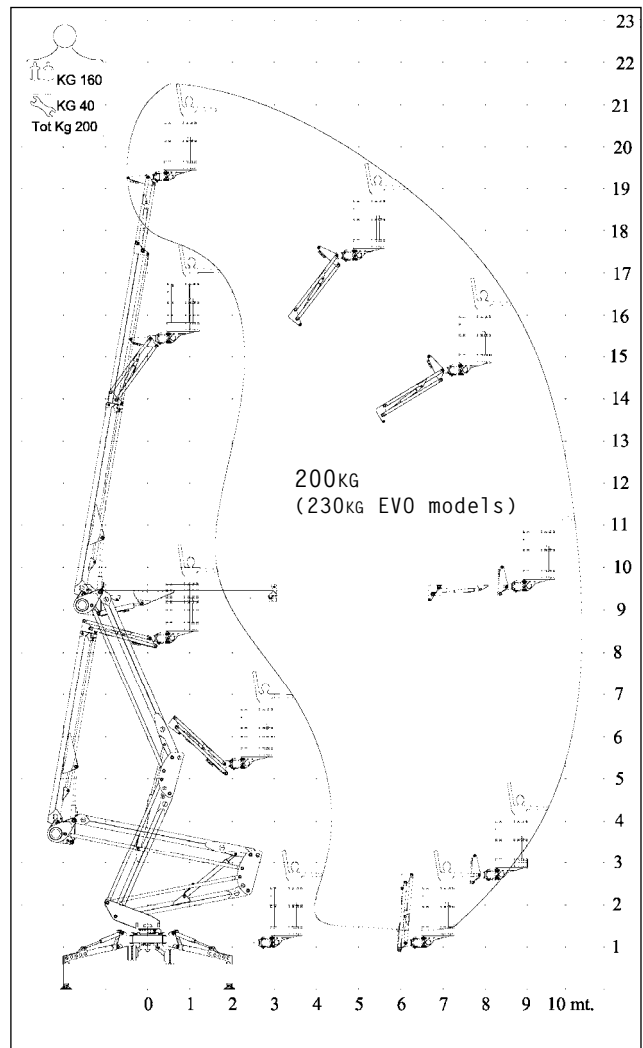

Complies with AS1418.10

(E & OE.)

